



TRANSPORT PLATFORM FOR PEOPLE

AND MATERIALS

NEW

Can be converted to a building hoist

GEDA[®]
500 Z/ZP

®

GEDA

GEDA[®] 500 Z/ZP

GEDA[®] transport platform for people and materials

The transport platform **GEDA[®] 500 Z/ZP** is a simple and inexpensive transport system for material and people.

The **GEDA[®]** transport platform complies with the Machinery Directive 98/37/EEC and is homologated for the lifting of max. 3 persons and material up to a total weight of 500 kg. **The transport platform has been tested by a European Notified Body and carries the CE mark.**



A trailer is available for road transport. The loading/unloading is effected by means of the drive unit of the transport platform.




Assembly of the mast sections and anchoring of the mast is done from inside the load platform. The handy 1.5 m high steel mast sections with captive screws and nuts can be assembled very quickly without the need for a crane.



Assembly plank (can be retrofitted) for anchoring the transport platform without pre-built scaffold.



Hot-dip galvanised landing level safety gates (1 piece is supplied with the base unit) with mechanically locked sliding door are installed at the landing levels to ensure safety of people.

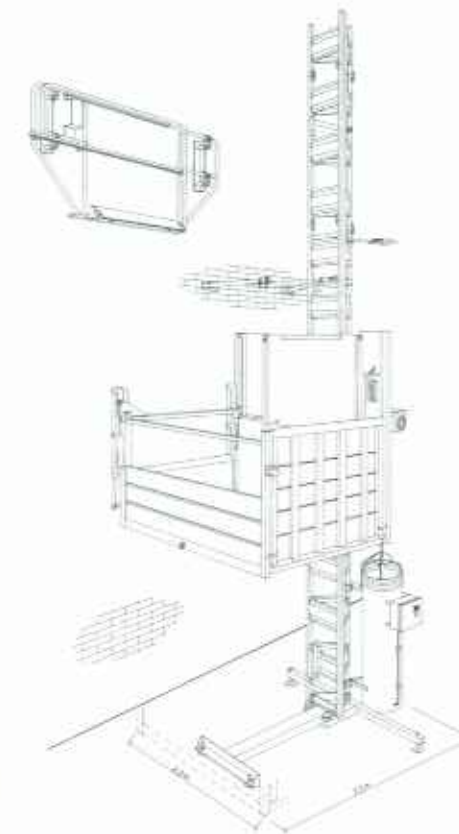

GEDA[®] 500 Z/ZP TRANSPORT PLATFORM FOR PEOPLE AND MATERIALS


can be converted to a building hoist for materials

- payload max. 500 kg inclusive of 3 persons
- lifting speed 12/24 m/min.
- lifting height 100 m

The base unit consists of:

- foot section with 4 adjusting spindles and 2.3 m high base mast
- trolley with drive unit 2.8/5.5 kW/400 V/50 Hz and overspeed safety brake
- safety stop approx. 2 m above the ground with warning sound
- operation and emergency limit switches at top and bottom
- permanently installed control unit with key-switch, assembly control, power socket 230 V
- power cut-off in case of overload with indication
- one landing level safety gate, complete (Art. No. 1177)
- limit switch activating elements (one each for landing level stop and emergency-off)
- manual control panel with 5 m cable, plug-in type
- drop test control for testing the overspeed safety brake, with 10 m cable, plug-in type
- crane jack and pick-up for transport by forklift truck

Load platform variants:

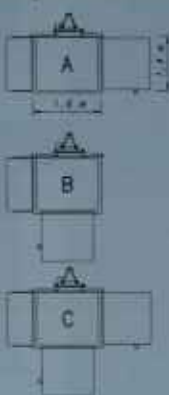

used as building hoist 500 Z (24 m/min.)



GEDA[®] 500 Z/ZP

- compatible mast (suitable from 500 to 1500 kg)
- spacious load platform, open at the top
- assembly without the need for a crane
- inexpensive partner



used as transport platform for people and materials 500 ZP (12 m/min.)



GEDA® PROGRAMME



Rope hoists: ■ Swivel arm hoists
■ Scaffolding hoists



Inclined lifts with steel wire rope



Inclined and vertical lifts with rack and pinion



Rack and pinion hoists with aluminium mast



Rack and pinion hoists with steel mast



Transport platforms



Passenger/material hoists



Suspended working platforms



Rubbish chutes