



**GEDA[®]-
COMBILIFT
200 Z**

LIFT FOR INCLINED AND VERTICAL USE WITH

BACK AND PINION DRIVE

NEW

®

GEDA

The low-priced ladder lift – now with completely new technique

All advantages at a glance:

- can be used vertically and inclined
- easy assembly and disassembly
- low price
- light-weight and robust

→ ideal for confined construction sites



Ladder section with 200 and 250 kg payload respectively

GEDA[®]-COMBILIFT 200 Z

for inclined and vertical use with rack and pinion drive

- safe working load in vertical use 200 kg
- safe working load in inclined use 250 kg
- lifting speed 25 m/min
- lifting height 30 m

Base unit consisting of

- base section 1.0 m
- trolley with drive unit 1.3 kW/230 V/50 Hz and overspeed safety device
- control unit, plug-in type, with 5 m cable
- spring cable reel with trailing cable for 30 m lifting height
- transport axle with wheels

Accessories for vertical use:

- load platform (inside dimensions 138 x 75 x 110 cm)
- support frame for scaffold tubes
- wall fixing frame
- landing level safety gate (hot-dip galvanised) with mechanically locked sliding door

Accessories for inclined use:

- load carrying devices from the GEDA[®]-Lift programme
- angle track section 20°
- angle track section extension piece 10°
- electric power distribution box
- cable drum with 33 m cable, 3 x 2.5 mm²
- extension cable 20 m for control unit
- roof tile batten trolley
- aluminium ladder prop 5.7 m



The GEDA-COMBILIFT 200 Z in inclined use with general purpose platform.



The angle track section (20°) can be extended by 10° segments to suit any angle.



The trailing cable is automatically fed into the internal cable duct.



A patented bolt free connecting system, ensures easy assembly and disassembly.



The compact base unit – suitable for both vertical and inclined use – consists of:

- base section
- trolley with drive unit
- spring cable reel with trailing cable
- transport axle



The ladder sections are connected by an integrated quick-lock that at the same time serves as limit stop and limit switch operating element.



The GEDA-COMBILIFT 200 Z in vertical use with load platform.





Safe access to the load platform, via integral platform and guardrail.



Load platform with support frame for scaffold tubes.



The front part can be opened completely, for easy loading/unloading of materials.

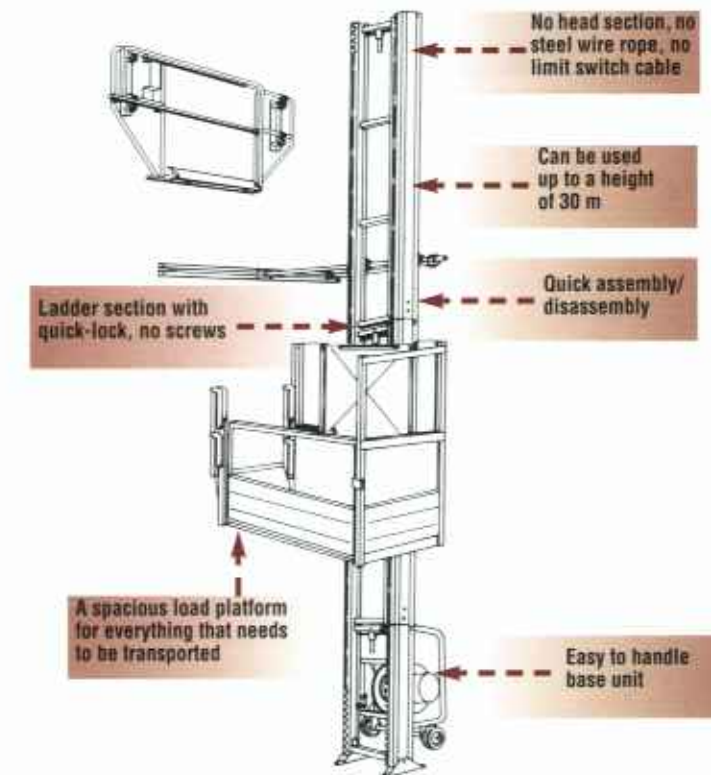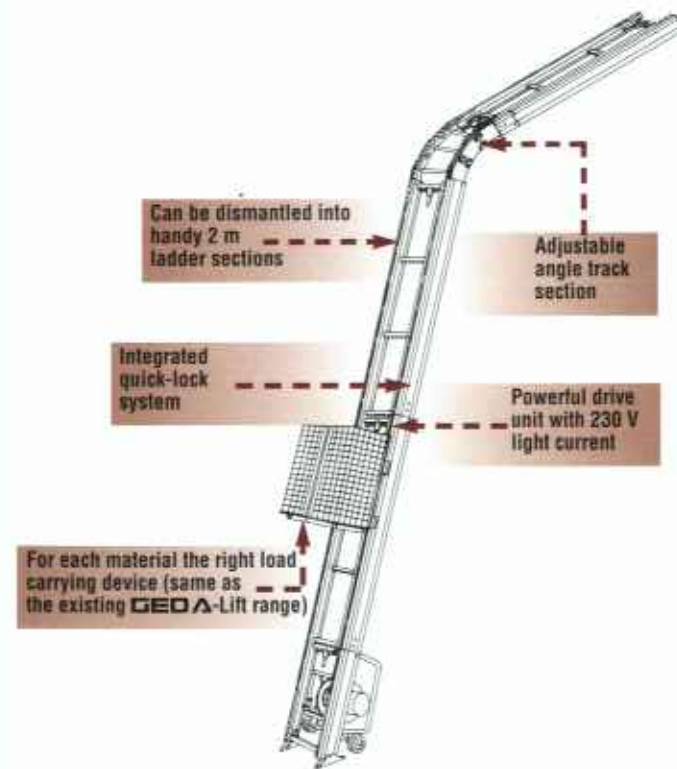

GEDA® PROGRAMME



Rope hoists: ■ Swivel arm hoists
■ Scaffolding hoists



Inclined lifts with steel wire rope



Inclined and vertical lifts with rack and pinion



Rack and pinion hoists with aluminium mast



Rack and pinion hoists with steel mast



Transport platforms



Passenger/material hoists



Suspended working platforms



Rubbish chutes